MODEL 98B
FOR FEEDING UP TO 550 TONS (495 MT) PER HOUR

You can move up to 550 tons (495 mt) per hour with the 98B. Standard tray sizes go up to 7 feet (2134 mm) long. Multiple drives are available on all heavy duty models where more than standard length is required. The drive unit is completely enclosed. Capacity is based on 42 x 54 inch (1067 x 1372 mm) tray properly installed with skirtboards.

Power Supply	230V, 460V, or 575V 50–60 Cycles, Single Phase
Full Load Power Input	35 Amp at 230V
Shipping Weight	2600 lb. (1180 kg)

SPECIFICATIONS

98B OVERHEAD–DRIVE STANDARD TRAYS

SIZE		A	B	C	D	E	F	G	H	J	K
18 x 96	in	18	96	27-5/8	20-3/4	43-5/8	96-5/8	98	37-3/8	17-3/4	23-1/2
	mm	456	2438	702	528	1108	2453	2490	948	451	595
24 x 84	in	24	84	33-5/8	19-3/4	44-1/8	90-5/8	86	45	19-5/8	24-5/8
	mm	610	2134	854	501	1121	2303	2186	1143	500	626
30 x 72	in	30	72	39-5/8	16-3/8	38-1/4	81-3/4	74-1/4	38-1/2	15-1/2	15-1/4
	mm	762	1829	1006	417	972	2075	1886	977	395	387
36 x 60	in	36	60	45-5/8	16-1/4	38-1/8	69-7/8	62-3/8	42	18-1/4	18-3/4
	mm	914	1524	1159	411	968	1776	1586	1066	463	476
42 x 54	in	41-7/8	54	51-5/8	13-3/8	36	65-1/2	56-5/8	41	15-1/2	16-7/8
	mm	1063	1372	1311	339	914	1663	1438	1043	393	428

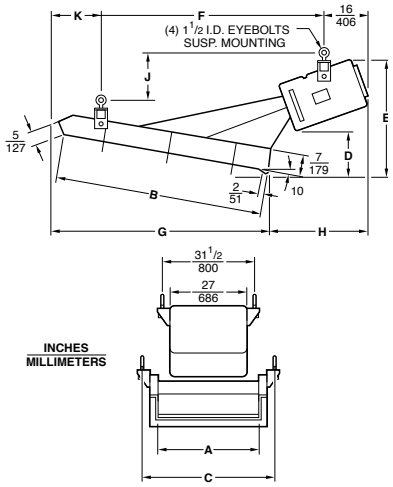

98B UNDER–DRIVE STANDARD TRAYS
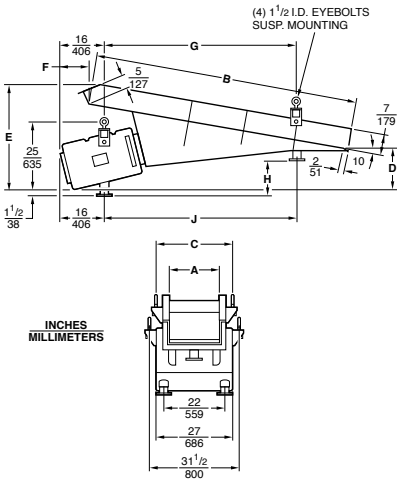
SIZE		A	B	C	D	E	F	G	H	J
18 x 96	in	18	96	27-5/8	11-3/8	34-5/8	18-3/8	62-5/8	12-1/8	61-1/4
	mm	457	2438	702	289	878	468	1592	309	1556
24 x 84	in	24	84	33-5/8	11-5/8	32-5/8	14	62-1/4	8-3/4	63-3/8
	mm	610	2134	854	296	829	356	1582	221	1610
30 x 72	in	30	72	39-5/8	12	30-7/8	20-1/4	56-5/8	8-1/2	57-3/4
	mm	762	1829	1006	305	785	514	1440	217	1467
36 x 60	in	36	60	45-5/8	18-1/8	35	22-1/2	43-1/2	14-5/8	44-1/2
	mm	914	1524	1159	460	889	571	1106	373	1130
42 x 54	in	42	54	51-5/8	14-1/2	30	31	57	8-3/4	57-5/8
	mm	1067	1372	1311	368	762	787	1448	222	1464